


TE 65 MULTIPLEX SAND/WHEEL ABRASION

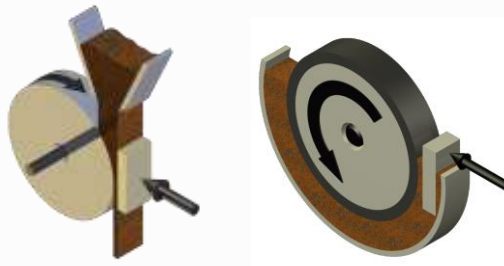

Description

The TE 65 Multiplex Sand/Wheel Abrasion Tester is designed to perform tests according to the conditions described in the following methods:

- ASTM G65 Standard Test Method for Measuring Abrasion Using the Dry Sand/Rubber Wheel Apparatus
- ASTM G105 Standard Test Method for Conducting Wet Sand/Rubber Wheel Abrasion Tests
- ASTM B611 Test Method for Abrasive Wear Resistance of Cemented Carbides

The machine is floor standing with test assemblies mounted on a back-plate and abradant discharged downwards into a collecting hopper. Load is applied by pneumatic cylinder in conjunction with a manually adjusted precision regulator, with a pressure sensor for load measurement. Speed set-point control is manual, implemented via a touch-screen PLC.



Standard Test Configurations

ASTM G65 uses hopper fed sand, which is delivered through a defined geometry nozzle. Enhanced control of the specified particle flow rate is achieved by the addition of a precision feed system.



For ASTM G105 and B611, a fluid trough is fitted, with the specified slurry agitated by vanes on the rotating wheel.

TE 65 MULTIPLEX SAND/WHEEL ABRASION TESTER

Technical Specifications

ASTM Conditions

Wheel Speed:	10 to 350 rpm
Wheel Types:	9" rubber wheel as per ASTM G65 6.65" steel wheel as per ASTM B611 7" rubber wheel as per ASTM G105
Load:	20 to 350 N
Motor Type:	a.c. motor with frequency inverter drive
Specimen Size:	25 mm x 58 mm
Specimen Thickness:	6 mm to 16 mm
Test Types:	ASTM G65, ASTM G105, ASTM B611

Services

Electricity:	220/240V, single phase, 50 Hz, 1 kW 110/120 V, single phase, 60 Hz, 1 kW
--------------	-----------------------------------------------------------------------------